


Guidelines: static bracing of system construction

Partition walls in system construction can be built in a length of 3 m without additional structural bracing. If spans of over 3 m are required, one or more of the bracing systems shown below must be used.



Partition walls between headstands must be constructed double-walled. Such a double wall should have a depth of at least 0.5 m. If supporting walls with a depth of 0.5 m are used this stand space is lost.

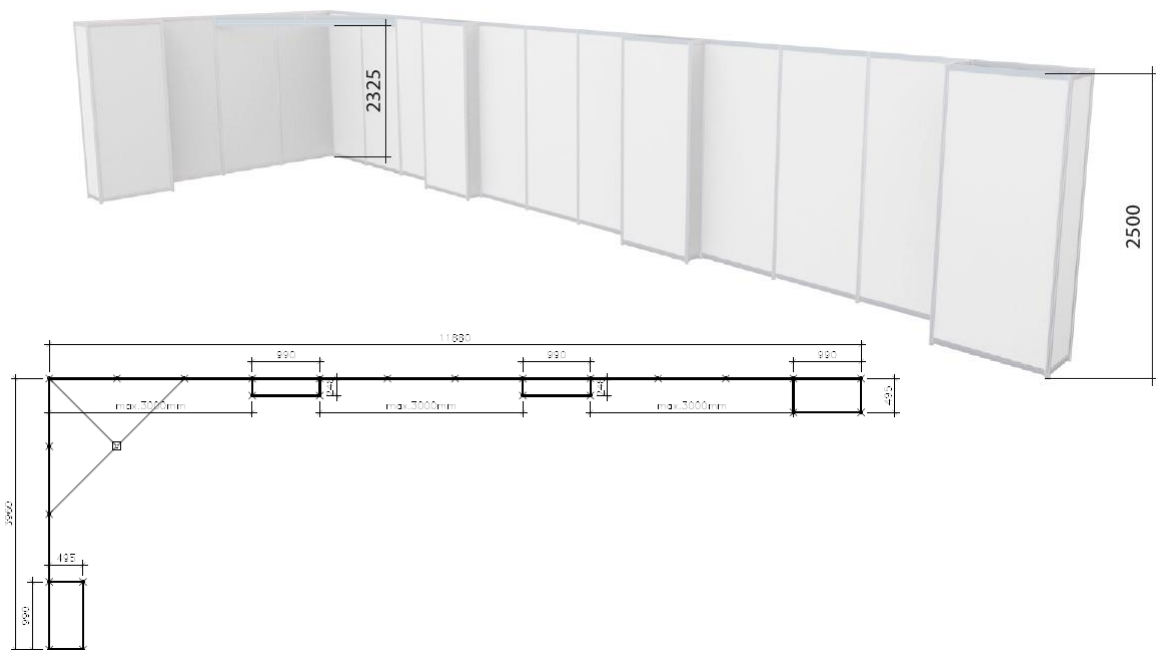